

A-A


max. Tragkraft [kg]	3500
Mbx [Nm]	2 x 6.500
Mby [Nm]	2 x 15.000
Fmax [kn]	45

Swingarm-Lift 2.35-2530

Alle Maße sind Mindestmaße in mm
all dimension are minimum in mm

Stempelabstand 2530 (3,5t)
piston distance 2530 (3,5t)

= Mindestmaß, sonst nach Bodenbeschaffenheit
= minimum, otherwise acc. to foundation requirements

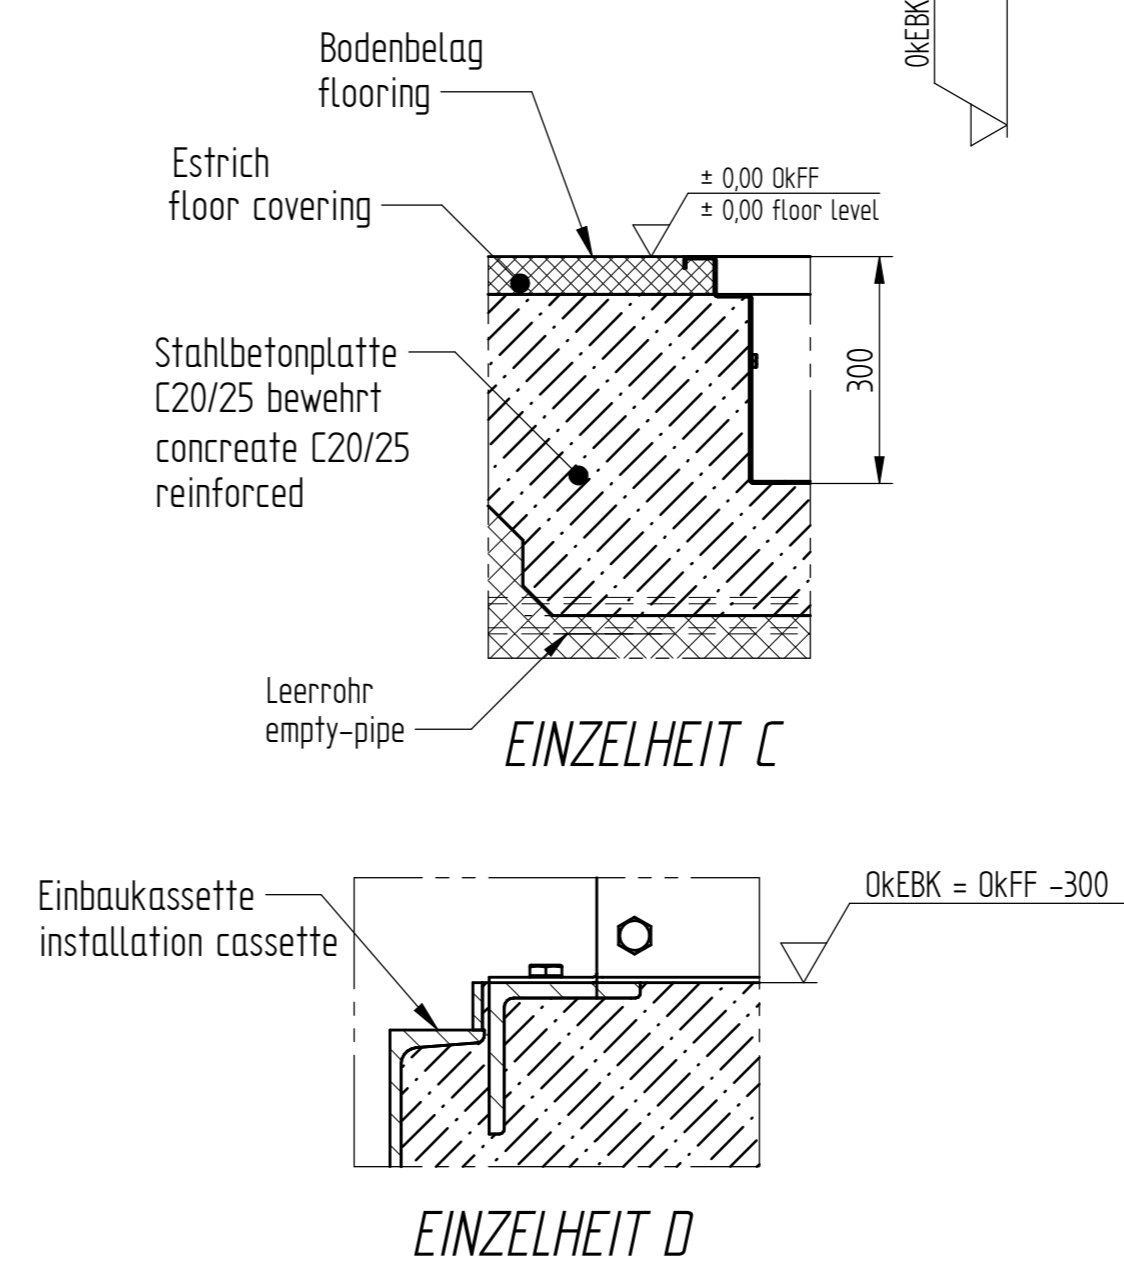

HERRMANN
Herrmann AG | Bahnhofstr. 32 | 93483 Posing

Zeichnungsnummer
FP2530-F-300-MA

Fundamentplan Multiarm SA2530 flureben
Foundation plan Multiarm SA2530 floor level

Stand
18.10.24
Zst. 0