
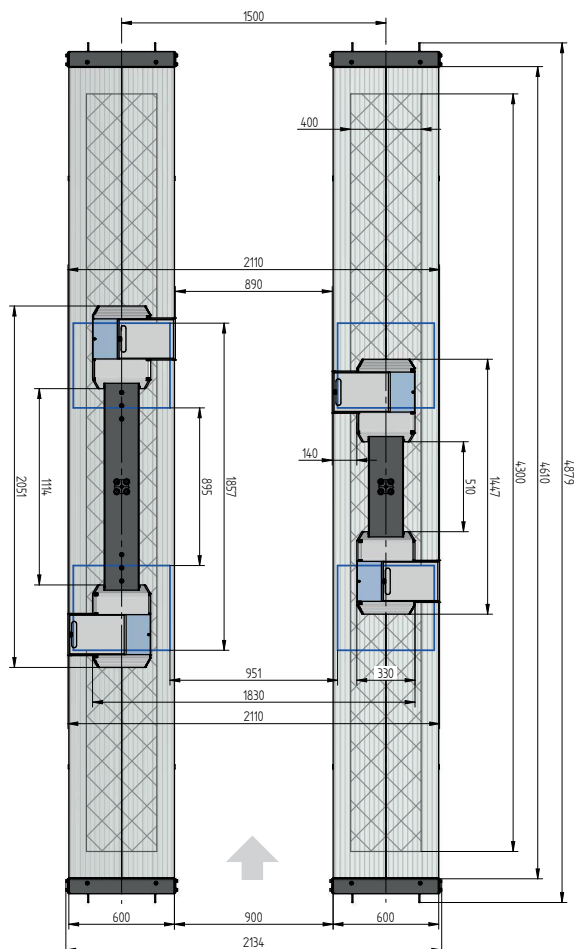


SURFACE MOUNTED

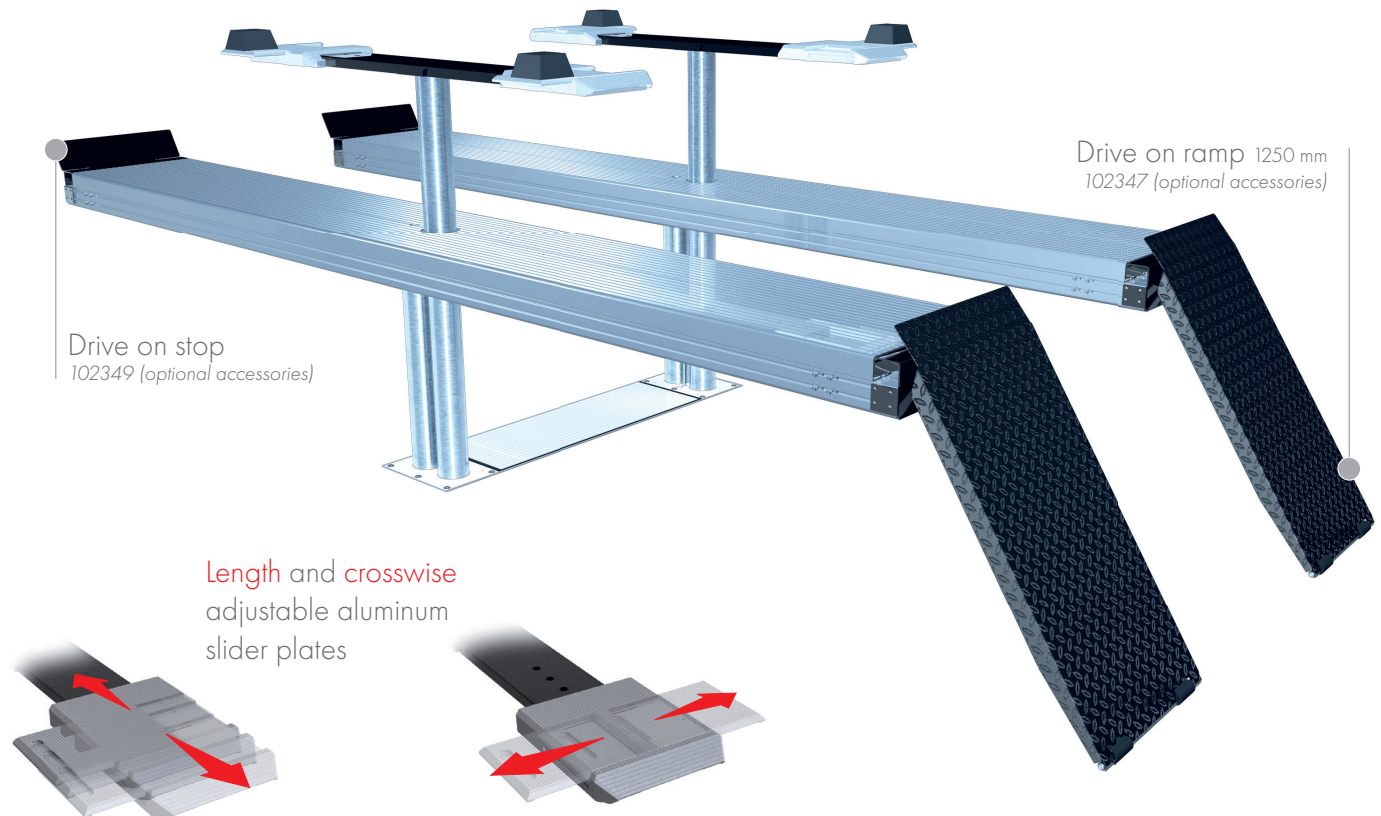


TECHNICAL DATA

capacity	5000 kg
wheel free lift	3500 kg
effect. raise height platform	2019 mm
effect. raise height wheel free unit	1979 mm
platform length	4800 mm
platform height	180 mm
drive over height wheel free unit	60 mm
piston diameter	123 mm
piston distance	1500 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.


Platform support Alu Track 2.50 Duplo	102756
Support Uni 2.35 plus	102640
Installation cassette STEEL 1500 mm	2190XX
Installation cassette STEEL 1500 mm galvanized	2191XX
Lifting unit oil 5,0 t Duplo 3,5 t 1500 mm - K pre-assembled in installation cassette	111603
Lifting unit oil 5,0 t Duplo 3,5 t 1500 mm - H packed in wooden box	111604

ALU TRACK 2.50 DUPLO UNI PLUS


ACCESSORIES

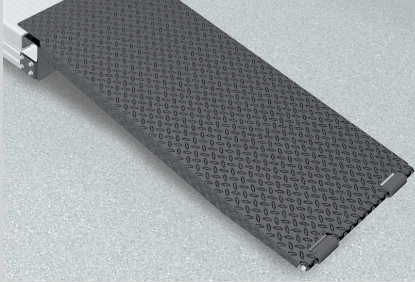

Drive on ramp
1250 mm
102347




Drive on stop
102349




Lighting
LED
111598




Slide rail
4800 mm
102375

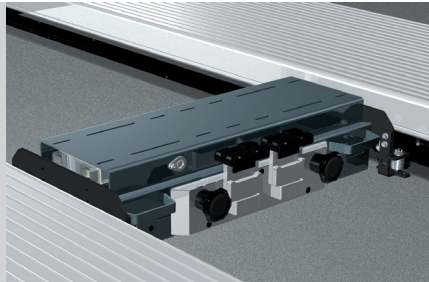

Axle lifter 2600 kg
pneumatic, without slide rails
105063

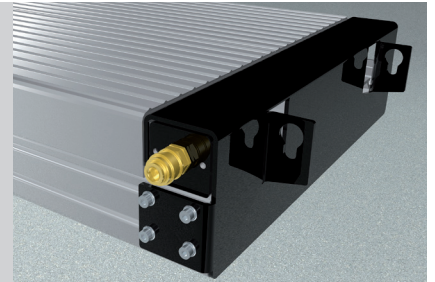

Compressed air supply
102407

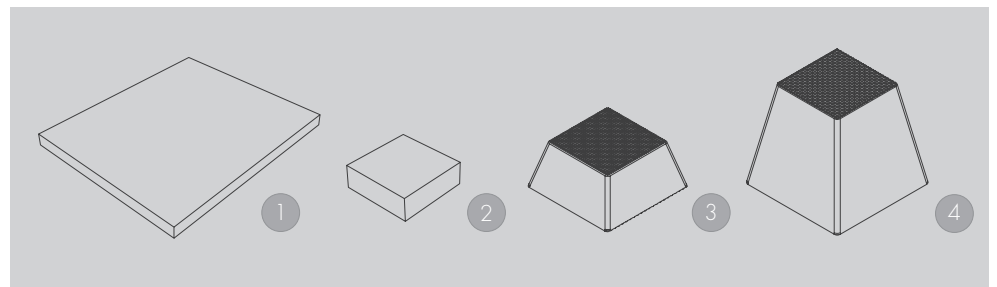

Rubber pads

- | | |
|-----------------------|-----------------------|
| 1 290 x 335 x 20 mm | 2 120 x 120 x 40 mm |
| 102275 | 102274 |

Rubber pads Pyramid

- | | |
|-----------|------------|
| 3 70 mm | 4 140 mm |
| 102273 | 102291 |

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Phone: +49 (0)9461/91388 50
E-Mail: sales@herrmann-lifts.com

www.herrmann-lifts.com

Amendments and mistakes reserved. All illustrations are not binding.

we lift cars